


BACKSHEET MONOCRYSTALLINE MODULE

PRODUCT: TSM-XXXDE19R

PRODUCT RANGE: 560-585W

585W


MAXIMUM POWER OUTPUT

0~+5W

BINNING TOLERANCE

21.6%

MAXIMUM EFFICIENCY

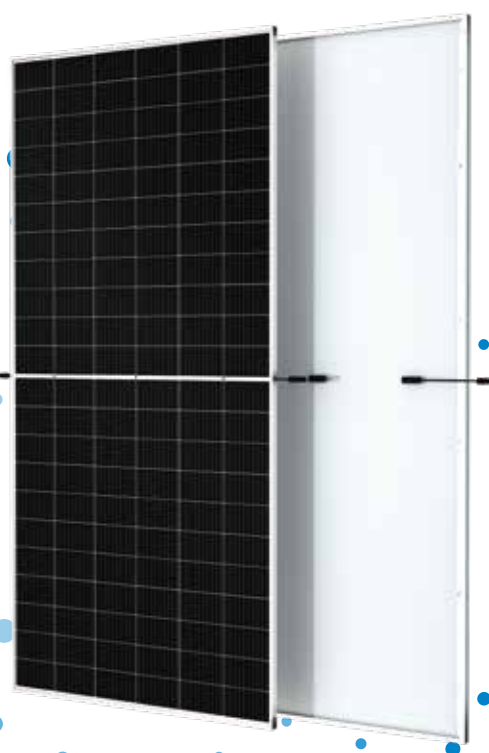

High customer value

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lower first year and annual degradation
- Designed for compatibility with existing mainstream system components
- Higher return on Investment



High power up to 585W

- Up to 21.6% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



High reliability


- Minimized micro-cracks with innovative non-destructive cutting technology
- Resistant to harsh environments such as salt, ammonia, high temperature and high humidity areas and Fire class rating C
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



High energy yield

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature

Trina Solar's Backsheet Performance Warranty

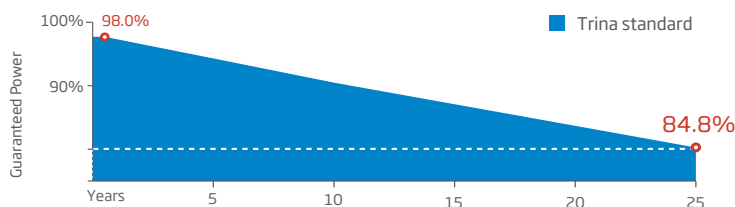


Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System




DIMENSIONS OF PV MODULE(mm)

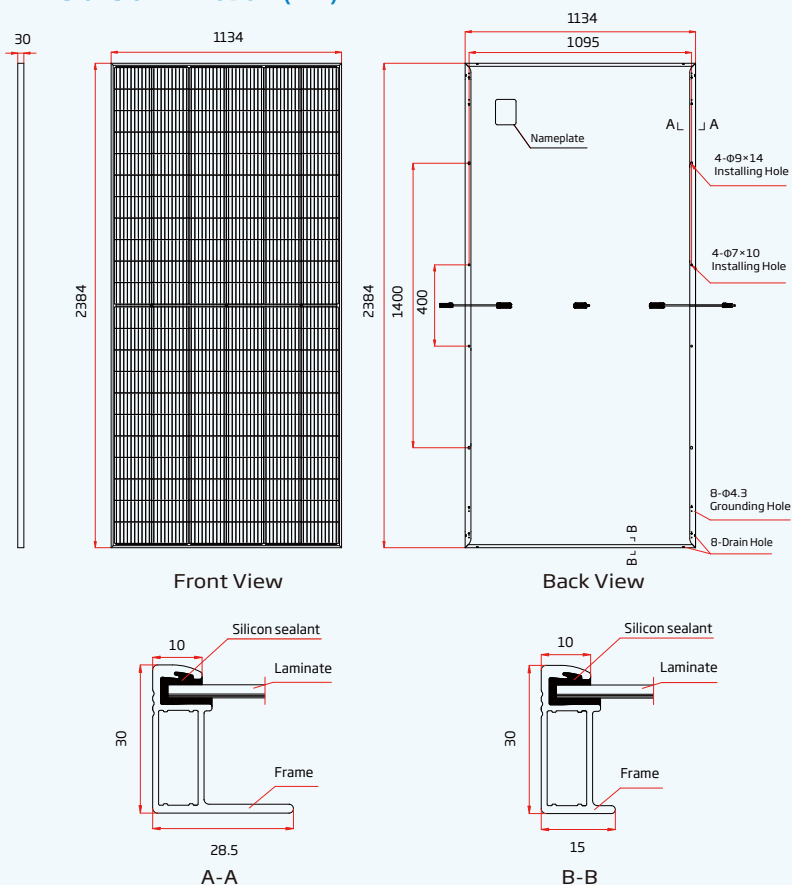

I-V CURVES OF PV MODULE(575 W)

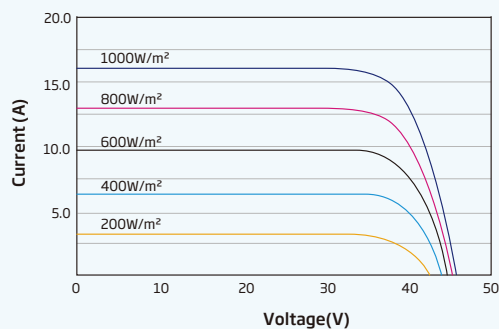

P-V CURVES OF PV MODULE(575W)

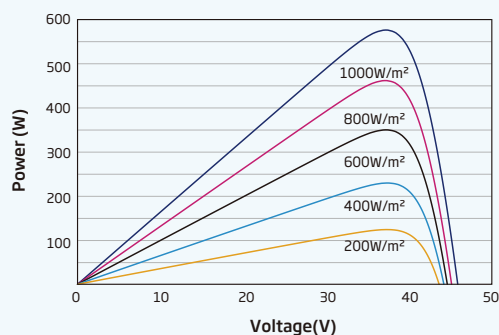

ELECTRICAL DATA (STC) TSM-XXXDE19R(XXX=560-585)

Peak Power Watts-P _{MAX} (Wp)*	560	565	570	575	580	585
Binning Tolerance-P _{MAX} (W)	0 ~ +5					
Maximum Power Voltage-V _{MPP} (V)	38.0	38.3	38.5	38.8	39.0	39.3
Maximum Power Current-I _{MPP} (A)	14.72	14.76	14.79	14.83	14.86	14.90
Open Circuit Voltage-V _{OC} (V)	45.3	45.6	45.8	46.1	46.3	46.6
Short Circuit Current-I _{SC} (A)	15.76	15.81	15.85	15.90	15.94	15.99
Module Efficiency η _m (%)	20.7	20.9	21.1	21.3	21.5	21.6

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Maximum Power-P _{MAX} (Wp)	423	428	431	435	439	443
Maximum Power Voltage-V _{MPP} (V)	35.1	35.3	35.5	35.8	35.9	36.2
Maximum Power Current-I _{MPP} (A)	12.06	12.10	12.13	12.17	12.20	12.24
Open Circuit Voltage-V _{OC} (V)	42.6	42.9	43.1	43.4	43.6	43.9
Short Circuit Current-I _{SC} (A)	12.70	12.74	12.77	12.81	12.84	12.88

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	132 cells
Module Dimensions	2384×1134×30 mm (93.86×44.65×1.18 inches)
Weight	28.8kg (63.49 lb)
Glass	3.2 mm (0.13 inches), High Transmission, Tempered Glass
Encapsulant material	EVA/POE
Backsheet	White
Frame	30mm(1.18 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm² (0.006 inches²), Portrait: 350/280 mm(13.78/11.02 inches) Length can be customized
Connector	Staubli MC4 EVO2 / Trina Solar TS4 Plus/ Trina Solar TS4

TEMPERATURE RATINGS

NOCT(Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P _{MAX}	-0.34%/°C
Temperature Coefficient of V _{OC}	-0.25%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	30A

WARRANTY

12 year Product Workmanship Warranty
25 year Power Warranty
2% first year degradation
0.55% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 36 pieces
Modules per 40' container: 720 pieces